



**Glass cloth base epoxy resin
Flame retardant copper clad laminate**

NPG-150N

■ FEATURES

- Halogen, antimony, and red phosphorous free
- Flammability meets UL 94V-0
- Excellent long term reliability
- UV blocking type
- IPC-4101E L127/128
- Reactive type flame retardants
- Mid. Tg and lower C.T.E will provide excellent through-hole reliability
- Superior CAF-Resistance (Anti-migration)

■ PERFORMANCE LIST

Characteristics	Unit	Condition	Typical Values	SPEC	Test Method
Volume resistivity	MΩ-cm	C-96/35/90	5.0 x10 ⁹	10 ⁶ ↑	2.5.17
Surface resistivity	MΩ	C-96/35/90	5.0 x10 ⁷	10 ⁴ ↑	2.5.17
Permittivity 1 MHz	-	C-24/23/50	4.2-4.4	5.4 ↓	2.5.5.9
Permittivity 1 GHz	-	C-24/23/50	3.8-4.0	-	2.5.5.9
Loss Tangent 1 MHz	-	C-24/23/50	0.013-0.015	0.035 ↓	2.5.5.9
Loss Tangent 1 GHz	-	C-24/23/50	0.011-0.013	-	2.5.5.9
Arc resistance	SEC	D-48/50+D-0.5/23	120 ↑	60 ↑	2.5.1
Dielectric breakdown	KV	D-48/50	60 ↑	40 ↑	2.5.6
Moisture absorption	%	D-24/23	0.20-0.30	0.8 ↓	2.6.2.1
Flammability	-	C-48/23/50	V-0	V-0	UL94
Peel strength 1 oz (≥0.5mm)	lb/in	288°Cx10" solder floating	8-10	6 ↑	2.4.8
Thermal stress	SEC	288°C solder dipping	300 ↑	10 ↑	2.4.13.1
Glass transition temp	°C	DSC	150 ± 5	N/A	2.4.25
Glass transition temp	°C	TMA	> 140	N/A	2.4.24
Dimensional stability X-Y axis	%	E-4/105	0.01-0.03	0.05 ↓	2.4.39
Coefficient of thermal expansion X-Y axis	ppm/°C	TMA	9-13	N/A	2.4.24
Z-axis before Tg	ppm/°C	TMA	30-50		
Z-axis after Tg	ppm/°C	TMA	200-230		
Decomposition temperature (Td 5% W/L)	°C	TGA	350	N/A	2.4.24.6

NOTE:

Data shown are nominal values for reference only.

The average value in the table refers to samples of .020" 1/1.

Test method per IPC-TM-650

博锐电路始终坚持"品质至上，服务根本"，的原则。为客户提供高效制造及可靠品质，迅速获得最佳的市场和竞争优势，是我们永恒的目标。

如您需要工程技术支持或报价服务，请联系工程技术：eq@brpcb.com；商务报价：sales@brpcb.com Web：www.brpcb.com
陈工10年PCB工程经验，专门为电子工程师提供2-36层（HDI任意阶阻抗）叠层阻抗设计服务 Tel：19195667992 0755-23599845



■ CONSTRUCTION

THICKNESS mm mil	CONSTRUCTION	THICKNESS mm mil	CONSTRUCTION
0.05 2	106 1 ply	0.35 14	7628 2 plies
0.08 3	2112 1 ply	0.38 15	7628 2 plies
0.10 4	1080 2 plies	0.45 18	7628x2+1080x1
0.11 4	2116 1 ply	0.50 20	7628 3 plies
0.13 5	1080 2 plies	0.53 21	7628 3 plies
0.13 sp 5	2116 1 ply	0.60 24	7628 3 plies
0.15 6	1506 1 ply	0.77 30	7628 4 plies
0.21 8	7628 1 ply	0.8 31.5	7628 4 plies
0.26 10	2116 2 plies	0.9 36	7628 5 plies
0.30 12	2116 3 plies	1.0 39	7628 5 plies
0.30 sp 12	1506 2 plies	1.2 47	7628 6 plies

• 1.2, 1.1, 1.0, 0.9, 0.8, 0.77 mm THICKNESS INCLUDE CLADDING, ALL OTHERS EXCLUDE CLADDING

■ PRODUCT SIZE & THICKNESS

THICKNESS inch (mm)	COPPER CLADDING oz (μm)	SIZE inch mm	THICKNESS TOLERANCE
0.002 (0.05) to 0.047 (1.2)	H (17) 1.0 (35) 2.0 (70) 3.0 (105)	48.8 x 36.6 1240 x 0930 48.8 x 40.5 1240 x 1030 48.8 x 42.5 1240 x 1080	IPC-4101E SPEC CLASS C/M

■ Keeping the core and prepreg in the same grain direction is crucial to ensure the flatness of multilayer boards.

■ Grain direction is shown on the certificate of conformance.

博锐电路始终坚持“品质至上，服务根本”，的原则。为客户提供高效制造及可靠品质，迅速获得最佳的市场和竞争优势，是我们永恒的目标。

如您需要工程技术支持或报价服务, 请联系工程技术: eg@brpcb.com ; 商务报价: sales@brpcb.com Web: www.brpcb.com
陈工10年PCB工程经验, 专门为电子工程师提供2-36层 (HDI任意阶阻抗) 叠层阻抗设计服务 Tel: 19195667992 0755-23599845



Glass cloth base epoxy resin
Flame retardant prepreg

NPG-150NB

■ FEATURES

- Halogen, antimony, and red phosphorous free
- Rheology of resin controlled to benefit the lamination of the boards.
- Modified phosphorous epoxy provides excellent heat and chemical resistance.
- Higher Tg: 150±5°C
- Other properties are similar to standard FR-4

■ PERFORMANCE LIST




Specification: IPC-4101E is applicable

Data shown are nominal values for reference only.

Glass style	RC%	GT sec (171°C)	VC%	After Pressed Thickness (per ply)	
				mm	mil
7628HR	50 ± 3	160 ± 20	1.5 ↓	0.193 ± 0.01	7.6 ± 0.4
7628MR	47 ± 3			0.183 ± 0.01	7.2 ± 0.4
7628	43 ± 3			0.173 ± 0.01	6.8 ± 0.4
1506MR	52 ± 3			0.157 ± 0.01	6.2 ± 0.4
1506	48 ± 3			0.145 ± 0.01	5.7 ± 0.4
2116HR	58 ± 3			0.120 ± 0.01	4.7 ± 0.4
2116MR	54 ± 3			0.109 ± 0.01	4.3 ± 0.4
2116	50 ± 3			0.097 ± 0.01	3.8 ± 0.4
2113	56 ± 3			0.081 ± 0.01	3.2 ± 0.4
2112	60 ± 3			0.069 ± 0.008	2.7 ± 0.3
1080HR	68 ± 3			0.064 ± 0.008	2.5 ± 0.3
1080MR	65 ± 3			0.061 ± 0.008	2.4 ± 0.3
1080	62 ± 3			0.058 ± 0.008	2.3 ± 0.3
106	68 ± 3			0.046 ± 0.008	1.8 ± 0.3
*1086	62 ± 3			0.066 ± 0.008	2.6 ± 0.3
*1067	68 ± 3			0.049 ± 0.008	1.9 ± 0.3
*1078	62 ± 3			0.058 ± 0.008	2.3 ± 0.3

*Laser drillable prepreg

Storage Stability

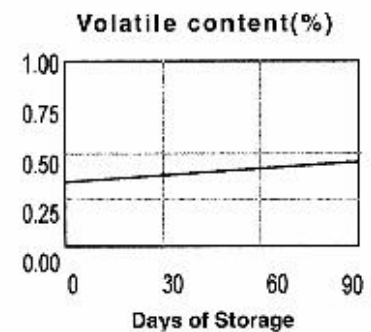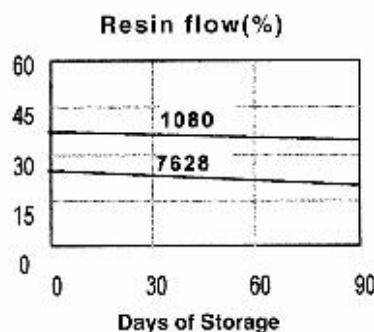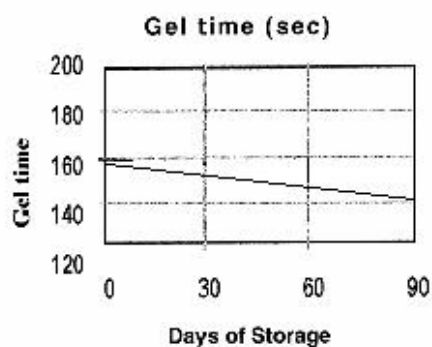

Storage Condition : 20°C 50% RH for 3 months
: Max. 5°C for 6 months

Data shown are nominal values for reference only.


博锐电路始终坚持"品质至上, 服务根本", 的原则。为客户提供高效制造及可靠品质, 迅速获得最佳的市场和竞争优势, 是我们永恒的目标。

如您需工程技术支持或报价服务, 请联系工程技术: eq@brpcb.com ; 商务报价: sales@brpcb.com Web: www.brpcb.com
陈工10年PCB工程经验, 专门为电子工程师提供2-36层(HDI任意阶阻抗)叠层阻抗设计服务 Tel: 19195667992 0755-23599845




Recommended press cycles:

A:2T2P(2 temperature step/2 pressure step)

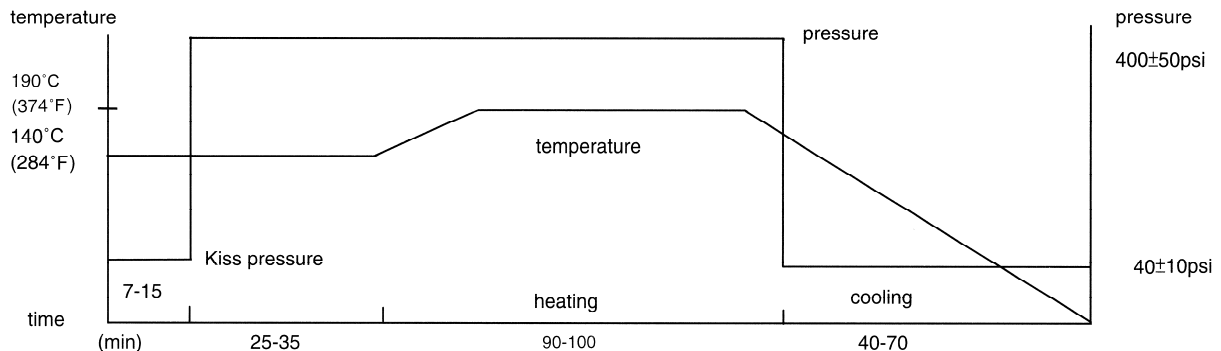

B:1T2P(1 temperature step/2 pressure step)

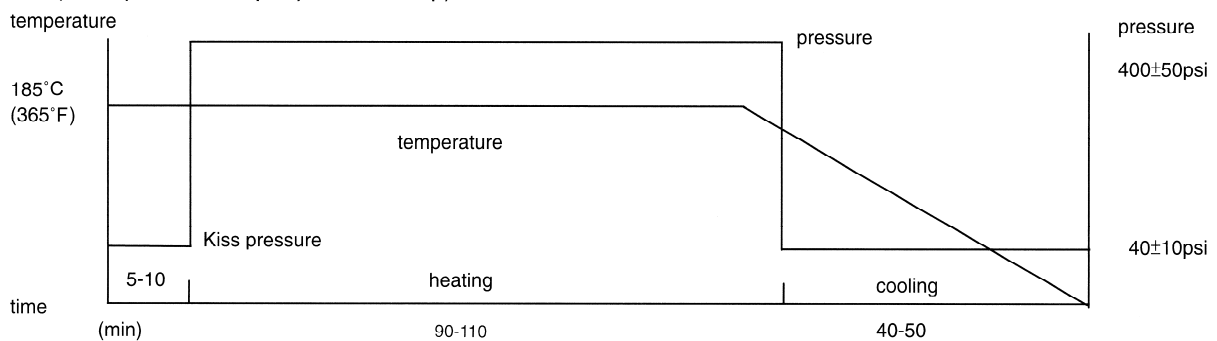

Suggestions:

1. Heating rate of material between 70°C(158°F) and 140°C(284°F).
1-3°C/min (1.8~5.4°F/min) is acceptable.
1.5-2.5°C/min (2.7~4.5°F/min) would be better.
2. Temperature of material over 170°C(338°F) must be held for at least 60 min to allow resin to fully cure.
3. The pressure should be kept below 100psi during cooling to ambient temperature.
4. Cooling rate of material should be kept under 2.5°C/min (4.5°F/min) when the temperature of material is over 100°C(212°F), in order to avoid introducing twist.

CERTIFICATION UL

- UL File No.: E98983
- ANSI TYPE: FR-4.1
- UL 746 Recognition

Minimum Material Thickness inch (mm)	Clad cond. Thickness		Max. Area Diameter inch (mm)	Max. Operating Temp	Solder Lts		UL 94 Flame Class
	Min. mils (μm)	Max. mils (μm)			Temp °C	Time sec	
0.0016 (0.04)	0.59 (15)	4.02 (102)	2.0 (50.8)	130	288	30	94V-0

博锐电路始终坚持"品质至上，服务根本"，的原则。为客户提供高效制造及可靠品质，迅速获得最佳的市场和竞争优势，是我们永恒的目标。

如您需要工程技术支持或报价服务，请联系工程技术：eq@brpcb.com；商务报价：sales@brpcb.com Web：www.brpcb.com
陈工10年PCB工程经验，专门为电子工程师提供2-36层（HDI任意阶阻抗）叠层阻抗设计服务 Tel：19195667992 0755-23599845